





Make a Statement.







# **AVAILABLE COLORS:**

Models 85, 86, 87, 88, 89, 272



















Models 90, 91, 92, 93, 94, 273







**AVAILABLE PANEL STYLES:** 



Short // Models 85, 90



Medium // Models 89, 91



Ranch // Models 87, 92



Flush // Models 86, 94



Stamped Carriage Short // Models 88, 93



Micro Ribbed // Models 272, 273

# Decorative Hardware



Hammered Iron Hinge





Steel Heritage Hinge

Hammered Iron Stud







Hammered Iron Handle











## **ESTATE WINDOW SERIES**



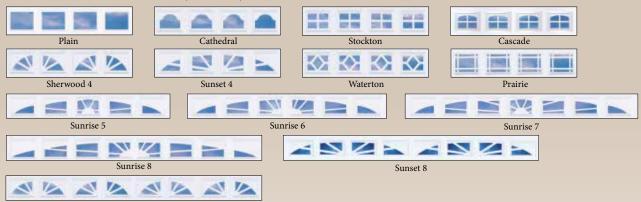


Sherwood 8


Model 89, 91, 272 & 273 | Medium | Raised Panel



Model 86, 87, 88, 92, 93, 94, 272 & 273 | Long Ranch | Raised Panel



# Gentry Window Series\*

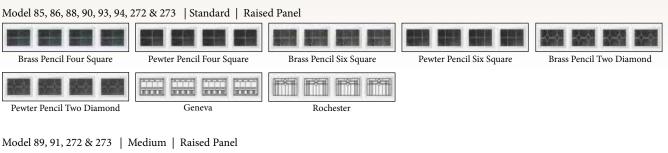



Rochester


Model 86, 87, 88, 92, 93, 94, 272 & 273 | Long Ranch | Raised Panel

Geneva

Rochester

Pewter Pencil Two Diamond

Geneva



\*Safe-Way recommends viewing samples of Gentry style window prior to ordering. Gentry depictions on this literature are actual photography however lighting inside or outside the garage can significantly impact the "look" of these windows. Please consult with your dealer prior to purchase.






### Construction

Two deep-drawn, tension-leveled, galvanized steel skins are polyester painted. The skins encapsulate a high density injected polyurethane core which is bonded using a polyurethane adhesive. Section joints sealed with a polypropylene bulb thermal break anchored within the polyurethane core. This construction method provides superb thermal performance, durability, strength, sound deadening qualities, and dent resistance for an all-around superior product.

A. Finish Painted Coat
B. Primer Coat
C. Galvanized Layer
D. Steel
B
C
C
B

- **A.** Tongue and groove enclosed with bulb type polypropylene thermal break anchored within the polyurethane core.
- **B.** 2" polyurethane injected insulation provides an R-value of 17.68
- **C.** Steel skins inside and out provide maximum durability.
- **D.** 20 gauge pre-painted heavy steel end stiles for added strength.
- **E.** Interior 20 gauge backer plate full height of section at all hinge points.
  - \* other features include: 11 ball nylon rollers provide quiet operation and long lasting durability.

Heavy duty galvanized 14 gauge hardware

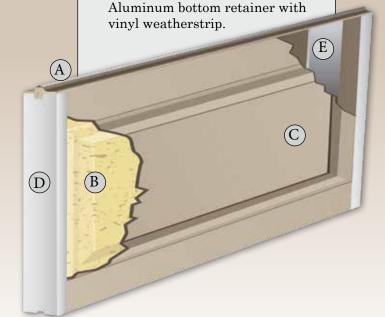

 $Distributed\ by:$ 





As Safe-Way Door constantly strives to improve our product, all specifications listed in this informative brochure are subject to change without notice or obligation. Printed color may vary from actual color, please check with your local dealer for color swatches.



3814 East U.S. 30 • Warsaw, IN 46580 **574-267-4861** • Fax: **574-267-2871** safe-waydoor.com